

# AVIDITY

SCIENCE

LABORATORY WATER SYSTEMS



## ▲ Enabling scientific research with a clearer laboratory water solution.

At Avidity Science, we are as enthusiastic about designing the ultimate laboratory water systems, as you are about your research and results.

Developed with today's laboratory in mind and manufactured in the UK to the ISO 9001:2015 standard, our range combines space and cost saving initiatives with a stylish finish – the Avidity Science way.

As your dedicated laboratory water experts, we can offer advice and guidance from initial enquiry, layout and distribution designs through to complete project management and installation.

Thereafter, you can rely on Avidity Science to maintain your pure water supply for years to come.



Certificate No: FS 558309

## Introducing the Avidity Science difference. Our strength is in supporting scientists.

We understand the critical nature of pure water for research facilities like yours; enabling scientific breakthroughs to be achieved across the research sector. That's why our products and services are based on your requirements. That's why we believe that we should be your trusted laboratory partner.

At Avidity Science, we offer a pure water solution for every laboratory application, supported by our experienced team of technicians who will ensure that your pure water supply is never compromised.

### EXPERT

*Nearly 70 years of water purification and delivery methods to provide unparalleled solutions to the laboratory space.*

### SUPPORT

*With a customer-centric culture and a focus on service excellence, we're there when and where you need us.*

### APPROACHABLE

*We genuinely enjoy the customers we work with. When you have a shared passion, it's easy to work together for a joint goal.*

### Excellent service in all forms.

User guides, video tutorials, online assistance, UK-based helpdesk and local technicians.

**Contact your Avidity Science representative today.**

+44 (0)1844 201142

[UK.Info@AvidityScience.com](mailto:UK.Info@AvidityScience.com)



## Complete Flexibility

The demands of your laboratory are different from the next. Our range was developed with the individual in mind.

Our remote and dual-remote dispensing options and intelligent space-saving designs which suit any on-bench, under-bench or wall space, mean that we can integrate our systems seamlessly into your laboratory.



## Understanding Water Purification

In order to process pure water that is suitable for use in scientific applications, we engage a number of technologies to remove impurities. Dependent on the application, the level of purification will differ, and we utilise specific technologies for each.

### PRE-TREATMENT

#### Filtration

Depth filters are commonly used as pre-treatment. Raw water passes through a series of wound fibres and carbon, which bind

and trap impurities. This offers protection to the RO membrane and other purification technologies that follow.

### TYPE 3 WATER

#### Reverse Osmosis (RO)

This is the most economical method of removing up to 98% of feed water inorganic contaminants and >99% of organics, bacteria and particulates. During natural osmosis, water flows from a less concentrated solution through a semi-permeable membrane to a more concentrated solution until concentration and pressure on both sides of the membrane are equal.

In water purification, external pressure is applied to the more concentrated side of the membrane to reverse the natural osmotic flow. This forces the feed water through the semi-permeable membrane to produce permeate. The impurities are deposited on the membrane surface and flushed to drain as concentrate.

### TYPE 2 WATER

#### Reverse Osmosis & Deionisation (DI) / Ion Exchange

This process removes ions from water, usually RO water, with the use of synthetic cation and anion resins. The ions are removed from the water through a series of chemical reactions. These reactions occur as the water passes through the ion

exchange resin beads. Gradually, all unwanted ions are exchanged for hydrogen and hydroxyl ions which combine to form pure water.

### TYPE 1 WATER

#### Ultraviolet (UV) Photo Oxidation at 254nm & 185nm

Photochemical oxidation and UV light eliminate trace organics and inactive microorganisms in feed water. The 254nm light reacts with bacterial DNA resulting in denaturation. The 185nm light breaks down long chain organics which can then be removed from the water by ion exchange.

#### Deionisation & Ultrafiltration (UF)

Ultrafiltration is used to remove pyrogens (bacterial endotoxins) and nucleases. Ultrafilters use size exclusion to remove particles and macromolecules. Typically, an ultrafilter is deployed at the end of the process to ensure near total removal of such impurities.

Ensuring precise purity for *your* applications.



<b>CONDUCTIVITY (µS/cm)</b>	Up to 1400	<b>POTABLE WATER FEED WATER TAP WATER</b>	Down to 0.001	<b>RESISTIVITY (MΩ-cm)</b>
	<75	<b>TYPE 3 WATER RO WATER PRIMARY GRADE</b>	>0.013	
	0.067 - 1	<b>TYPE 2 WATER DI WATER LABORATORY GRADE</b>	1 - 15	
	0.055	<b>TYPE 1 WATER ULTRAPURE WATER POLISHED WATER</b>	18.2	

## Quick Product Finder

### REVERSE OSMOSIS



**Puro™** Pages 10-11

**Production Rate**  
10, 20, 50 or 80L/hr  
10 to 800L/day

Low to large RO water volumes  
Reservoir required

### DEIONISED



**Geno™** Pages 12-13

**Production Rate**  
10, 20 or 50L/hr  
10 to 500L/day

Low to large DI water volumes  
Reservoir required

### ULTRAPURE



**Alto™** Pages 14-15

**Production Rate**  
2L/min volumetric dispense

Feed with pre-purified water  
UF options available

**Pico™** Pages 8-9

**RO or DI Water**

**Production Rate**  
10 or 20L/hr

Low water volumes  
(<120L/day)  
35L integrated tank



**Duo™** Pages 16-17

**Dual System  
(DI & 18.2MΩ)**

**Type 2  
Production Rate**  
10 or 20L/hr

**Type 1  
Dispense Rate**  
2L/min volumetric dispense  
UF options available  
Reservoir required



### TYPE 3 WATER

Reverse Osmosis (RO)

<75µS/cm  
Up to 98% rejection of incoming feedwater inorganics, typically

#### APPLICATION

- Autoclave Feed
- Glasswasher Feed
- Feed to Ultrapure Water Systems
- Hydroponics
- Steam Generators

### TYPE 2 WATER

Deionised (DI)

1-15MΩ-cm  
TOC ≤50ppb

#### APPLICATION

- Buffer & Media Preparation
- Sample Dilution & Reagent Preparation
- Spectrophotometry
- Protein Electrophoresis
- Cytology & Histology
- Glassware Washing & Rinsing

### TYPE 1 WATER

Ultrapure

18.2MΩ-cm  
TOC ≤50ppb, typically <5ppb  
Endotoxin <0.03EU/ml

#### APPLICATION

- Molecular Biology
- Electrochemistry
- Critical Cell & Tissue Culture
- (GF) AAS, HPLC, IC, ICPMS, GC, MS
- DNA Sequencing
- Genomics
- Proteomics
- Immunology
- Pharmacology



**Reservoirs**



**Consumables**



**Service**

# Pico™

## The compact unit making a big impact.



### Reverse Osmosis or Deionised Water

No longer compromise your laboratory space. No longer compromise on quality.

The Pico™ utilises proven water purification technologies to provide Type 2 or Type 3 water, on request. Call for water from the integral 35L reservoir via the dispense tap on the front of the machine, to obtain the concise water you need, when you need it, with fast dispense.



#### Applications:

**Type 2:** Buffer & Media Preparation, Sample Dilution & Reagent Preparation, Spectrophotometry, Protein Electrophoresis, Cytology & Histology, Glassware Washing & Rinsing

**Type 3:** Glasswasher Feed, Autoclave Feed, Feed to Ultrapure Systems, Hydroponics, Steam Generators

#### Handing you the control.

The intuitive touch-screen control panel gives you instant access to the data you need. Check-up on water quality and how many litres are available in the tank, without taking your gloves off.

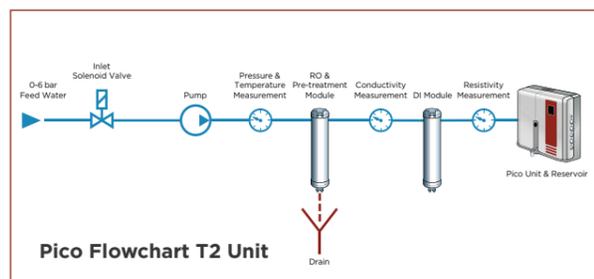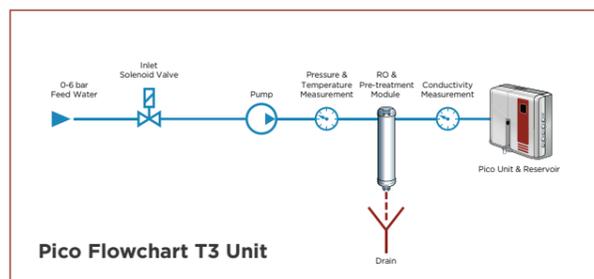

*Pico. Small in size. Big in Benefits.*

#### Features:

- Space-saving footprint with integrated 35L reservoir
- Type 3 (RO) or Type 2 (DI) water
- Make up rate 10 or 20L/hr with fast dispense
- Simple touchscreen control
- Wall or bench mounting
- Quiet, internal boost pump and patented anti-vibration mountings
- Simple maintenance - change consumables in seconds
- Energy consumption of <40w when processing water



MODEL	MAKE-UP RATE (@ 15°C)	WATER QUALITY	TOC	ORGANICS REJECTION RATE	DAILY USAGE (MAX)
PICO10T3	10L/hr	<75µS/cm	-	>99%	100L/day
PICO20T3	20L/hr	<75µS/cm	-	>99%	200L/day
PICO10T2	10L/hr	1-15MΩ-cm	≤30ppb	-	100L/day
PICO20T2	20L/hr	1-15MΩ-cm	≤30ppb	-	200L/day

#### Maintaining quality at a lower cost.

The unique reverse osmosis (RO) cartridge has an in-built pre-treatment which only requires changing once per year<sup>1</sup>. This maintains optimum performance as there is no deterioration of quality from an over-worked RO membrane. The high recovery rate means the cost of waste water is also kept to a minimum.

DIMENSIONS (mm)	WEIGHT (kg)
500 (H) x 485 (W) x 330 (D)	20 (empty reservoir)

<sup>1</sup>Dependent on usage



# Puro™

## Pure water in high demand.



### Reverse Osmosis

The fundamental solution for your laboratory's fundamental processes.

Using high recovery RO technology, Puro™ efficiently removes up to 99% of contaminants from main feed water to produce primary grade (RO) water.

The integral boost pump simplifies installation and avoids unexpected cost of reduced flow rates due to poor inlet pressure.

#### Applications:

**Type 3:** Glasswasher Feed, Autoclave Feed, Feed to Ultrapure Systems, Hydroponics, Steam Generators

*Puro. It speaks volumes.*

#### Features:

- Up to 50% water recovery rate
- Low running costs
- One easy-change pre-filter
- Mount on bench, wall or on top of a reservoir
- Intuitive, icon-based, interactive user interface with touchscreen
- Integrated leak detector and boost pump
- Choice of storage reservoir size



#### Maximising flow. Minimising shortages.

With a choice of four flow rates up to 80L/hr and a variety of storage options, feeding the critical equipment in your laboratory with RO water has never been so made-to-measure. Your RO water demands will always be met with the Puro™ installed.

#### Minimising footprint. Maximising your space.


Due to its nominal footprint, the Puro™ will fit perfectly on the bench, can be wall-mounted, or can be combined with the reservoir as a space-friendly, stand-alone system.

DIMENSIONS (mm)	WEIGHT (kg)
500 (H) x 490 (W) x 290 (D)	23 (empty reservoir)

#### Minimising waste. Maximising recovery.

Keeping running costs low is one of your priorities. So, we made it our priority to design a system to help you do this. The Puro™ features an RO recovery loop, to reduce waste water and increase efficiency.

MODEL	MAKE-UP RATE (@15°C)	INORGANICS REJECTION RATE
<b>PURO10</b>	10L/hr	98%
<b>PURO20</b>	20L/hr	98%
<b>PURO50</b>	50L/hr	98%
<b>PURO80</b>	80L/hr	98%

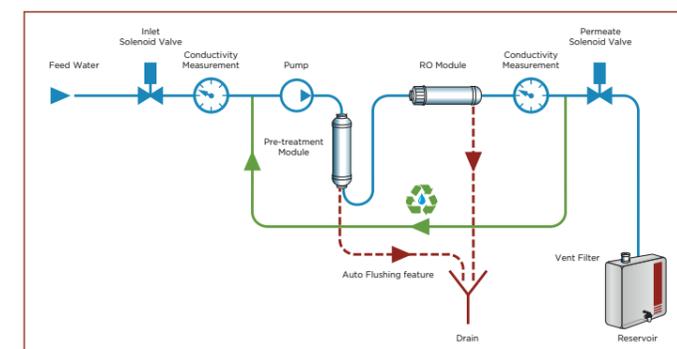

# Geno™

## For all sensitive laboratory applications.



### Deionised Water

**The hardest working system in your laboratory; one that you can rely on.**

The Geno™ was born from the technological and mechanical design of the Puro™ (RO System), with the introduction of the Endure™ pack which applies deionisation to the system without adding to its footprint.

#### Applications:

**Type 2:** Buffer & Media Preparation, Sample Dilution & Reagent Preparation, Spectrophotometry, Protein Electrophoresis, Cytology & Histology, Glassware Washing & Rinsing

### Delivering DI at the rate you need.

The Endure™ pack can be paired with a choice of RO membrane quantities to provide DI water at 10, 20 or 50 litres per hour. Combined with a 30, 60 or 100 litre tank, we guarantee to have the right combination for you.

**Our design engineers can advise on the best combination for your space and application.**



### Keeping an eye-out for you.

Geno™ has several in-built monitoring devices allowing you to focus your full attention on your experiments, instead of worrying about the performance of your general laboratory water system. An integrated leak detector and resistivity sensors will let you know if parameters are exceeded and protect the unit's operation where necessary.

## Geno. Beyond expectation.


#### Features:

- Up to 50% water recovery rate
- Low running cost
- Easy-change pre-filter and quick-disconnect Endure™ DI Pack
- Mount on bench, wall or on top of a reservoir
- Intuitive, icon-based, interactive user interface with touchscreen
- Integrated leak detector and boost pump
- Choice of storage reservoir size



### Keeping it simple.

The integrated boost pump in this well considered design means that installation requirements are much simpler than its rivaling systems and ensures the Geno™ can deliver optimised performance irrespective of your existing incoming water supply pressure.

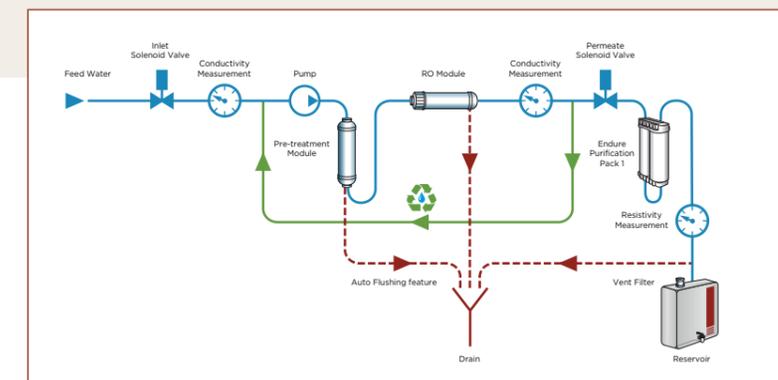

MODEL	MAKE-UP RATE (@15°C)	WATER QUALITY	TOC
<b>GENO10</b>	10L/hr	1-15MΩ-cm	≤30ppb
<b>GENO20</b>	20L/hr	1-15MΩ-cm	≤30ppb
<b>GENO50</b>	50L/hr	1-15MΩ-cm	≤30ppb

DIMENSIONS (mm)	WEIGHT (kg)
500 (H) x 490 (W) x 290 (D)	23 (empty reservoir)

18.2MΩ  
TYPE 1 WATER

# Alto™ Ultrapure. Ultra-sleek. Ultra-sustainable.



## 18.2MΩ Water

### The most flexible polisher available.

Alto™ processes Type 1 water on demand. The system can be fed from a store of pre-purified water or directly from a pressurised Type 2 or Type 3 feed. It features quick-change, long-lasting consumables and TOC monitoring which ensure the highest of purity for your application.

### Applications:

**Type 1:** Molecular Biology, Electrochemistry, Critical Cell & Tissue Culture, Analytical Chemistry, DNA Sequencing, Genomics, Proteomics, Immunology, Pharmacology



### When your application is critical, the information is critical.

Instant access to data whenever you need it. Check the resistivity, TOC level and set the dispense or volumetric rate via the intuitive, icon-based touch-screen on each dispenser. You can achieve all of this without taking your gloves off, saving you time.



### The possibilities are endless.

Choose from an integrated dispenser, add an additional remote dispenser, or opt for two remote dispensers installed up to 3m from the Alto™ base unit. The unit itself can be bench-mounted, under-bench or wall mounted as an option.

*Our design engineers can advise on the best combination for your space and application.*

*Alto. It will work around you.*

### Features:


- Option of integrated and remote dispensers (up to two)
- Intuitive, icon-based, interactive user interface with touchscreen
- Fast dispense of up to 2L/min with volumetric dispense as standard
- Mount on-bench, under-bench or on the wall
- Continuous TOC monitoring
- Low Endotoxin, RNase, DNase and Protease option (UF Model) available
- Dual wavelength UV lamp (185nm/254nm)



MODEL	DISPENSE RATE (@15°C)	INORGANICS REJECTION RATE	BACTERIA	TOC	ENDOTOXINS	RNASE	DNASE	PROTEASE
ALTO TOC	2L/min	98%	<1cfu/ml	≤5 ppb	-	-	-	-
ALTO TOC UF	2L/min	98%	<1cfu/ml	≤5 ppb	0.001 EU/ml	<1pg/mL	<5pg/mL	<0.15µg/mL

### Sustaining environment and budget.

The energy-saving mode automatically engages when not in use and will periodically re-circulate the water to maintain quality. Our Endure™ deionisation packs contain more than 3 litres of resin, providing optimum longevity. That's good for you. They are also made from a recyclable plastic. That's good for the planet.

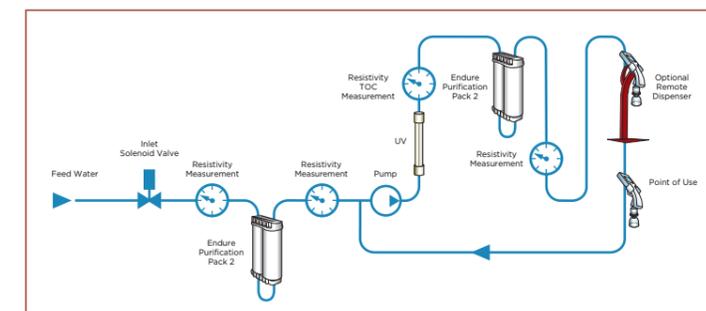

DIMENSIONS (mm)	WEIGHT (kg)
670 (H) x 490 (W) x 290 (D)	26 (installed weight)

DI  
TYPE 2 WATER

18.2MΩ  
TYPE 1 WATER

# Duo™

## Dual quality. One clear solution.



### Deionised and Ultrapure Water

The laboratory water system providing highest specification, as standard.

The Duo™ combines the trusted purifying technology of the Geno™ Type 2 system, with the impressive flexibility of the Alto™ Type 1. Process potable water to Type 2 for the storage reservoir; to be used for general laboratory application, or for when you call for Type 1 from the dispenser as required.

#### Applications:

**Type 1:** Molecular Biology, Electrochemistry, Critical Cell & Tissue Culture, (GF) AAS, HPLC, IC, ICPMS, GC, MS, DNA Sequencing, Genomics, Proteomics, Immunology, Pharmacology


**Type 2:** Buffer & Media Preparation, Sample Dilution & Reagent Preparation, Spectrophotometry, Protein Electrophoresis, Cytology & Histology, Glassware Washing & Rinsing

#### Unrivalled delivery.

Tailor the delivery options to your demands. Fill a 30 litre reservoir in 1.5 hours with General Laboratory Grade water and use the intuitive volumetric dispense to call for Ultrapure water exactly when your work requires it at up to 2L/min.

#### Dual quality. Dual pass. Dual wavelength.

The Duo™ applies the most effective features from the whole range. This includes the low-wastage RO recirculation loop, UV light technology at 185nm/254nm dual wavelengths, Endure purification packs, continuous TOC monitoring and anti-vibration technologies to minimise noise. It's the whole package.

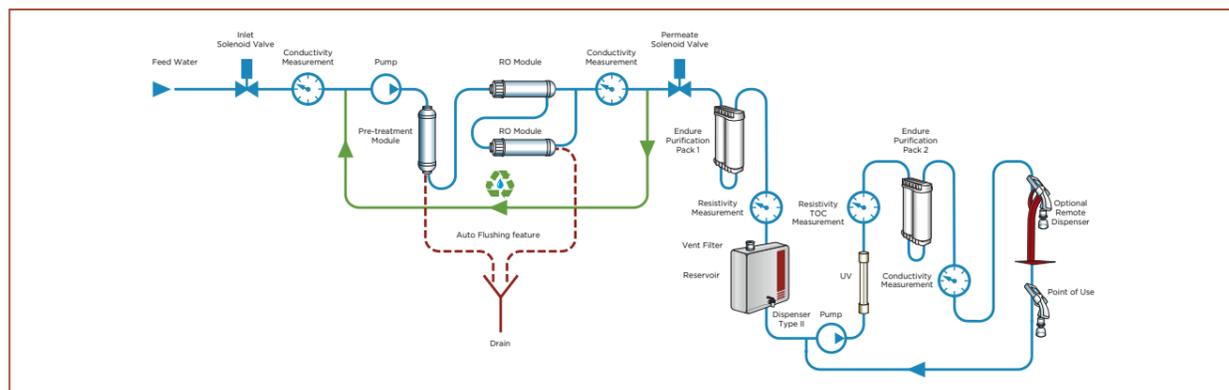


*Duo. The best of both worlds.*

#### Features:

- Option of integrated and remote dispensers (up to two)
- Intuitive, icon-based, interactive user interface with touchscreen
- Fast dispense of up to 2L/min Ultrapure Water with volumetric dispense as standard
- Type II make up rate of 10 or 20 litres per hour with a choice of reservoir size
- Mount on-bench, under-bench or on the wall
- Continuous TOC monitoring
- Low Endotoxin, RNase, DNase and Protease options available



MODEL	18.2M DISPENSE (@15°C)	DI MAKEUP RATE (@15°C)	DISPENSER WATER QUALITY	BACTERIA	TOC	ENDOTOXINS	RNASE	DNASE	PROTEASE
<b>DUO10</b>	2L/min	10L/hr	18.2MΩ	<1 cfu/mL	≤5ppb	-	-	-	-
<b>DUO10UF</b>	2L/min	10L/hr	18.2MΩ	<1 cfu/mL	≤5ppb	0.001 EU/mL	<1pg/mL	<5pg/mL	<0.15 µg/mL
<b>DUO20</b>	2L/min	20L/hr	18.2MΩ	<1 cfu/mL	≤5ppb	-	-	-	-
<b>DUO20UF</b>	2L/min	20L/hr	18.2MΩ	<1 cfu/mL	≤5ppb	0.001 EU/mL	<1pg/mL	<5pg/mL	<0.15 µg/mL

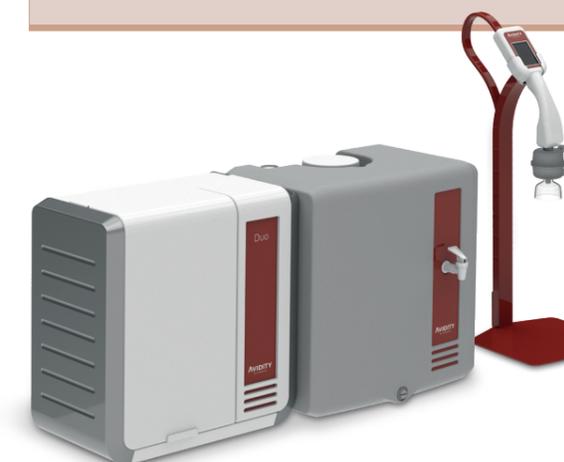

#### It's so quiet. It's a Duo™.

With the same patented anti-vibration technology as the Pico™, the Duo™ has a quiet operation volume, as to not disturb your working environment.

DIMENSIONS (mm)	WEIGHT (kg)
500 (H) x 490 (W) x 290 (D)	30 (installed weight)

# Avidity Science Service, from the start.

Avidity Science can provide specialist support from our experienced, UK-based, project team who are equipped with the latest in design technology, to help deliver the right solution to your laboratory.

We will guide you through product selection and layout designs and our installation engineers will ensure minimal disruption to your work whilst we commission your new laboratory water systems for you.

Following that, explore our range our service contract options which offer a variety of levels of cover and support dependent on your requirements and your budget.



## Consumables

Our consumables are designed specifically for our systems meaning they are the highest in efficiency and lowest in cost to you. Each system is provided with a consumable replacement guide to ensure that your new laboratory water system is always performing at its optimum to support your research.



## Reservoirs

### Features:

- Made from high quality virgin polyethylene
- Designed to be fully drainable
- Smooth, crevice-free interior
- Connection to feed a laboratory dishwasher
- Dispense tap can be mounted in the middle or bottom locations
- Optional UV light kit available
- Optional distribution pump on the 100L tank



# Ordering information

MODEL RANGE	PART NUMBER	DESCRIPTION
<b>Pico™</b>	PICO10T2	Pico™ Type 2 Water System - Integral 35L Tank - 10L/hr
	PICO10T2UV	Pico™ Type 2 Water System - Integral 35L Tank - 10L/hr - UV
	PICO10T3	Pico™ Type 3 Water System - Integral 35L Tank - 10L/hr
	PICO10T3UV	Pico™ Type 3 Water System - Integral 35L Tank - 10L/hr - UV
	PICO20T2	Pico™ Type 2 Water System - Integral 35L Tank - 20L/hr
	PICO20T2UV	Pico™ Type 2 Water System - Integral 35L Tank - 20L/hr - UV
	PICO20T3	Pico™ Type 3 Water System - Integral 35L Tank - 20L/hr
	PICO20T3UV	Pico™ Type 3 Water System - Integral 35L Tank - 20L/hr - UV
	TC030	Pico™ Annual Consumable Pack - 10T2
	TC031	Pico™ Annual Consumable Pack - 10T2UV
	TC032	Pico™ Annual Consumable Pack - 10T3
	TC033	Pico™ Annual Consumable Pack - 10T3UV
	TC034	Pico™ Annual Consumable Pack - 20T2
	TC035	Pico™ Annual Consumable Pack - 20T2UV
TC036	Pico™ Annual Consumable Pack - 20T3	
TC037	Pico™ Annual Consumable Pack - 20T3UV	
<b>Puro™</b>	PURO10	Puro™ Type 3 Water System - 10L/hr
	PURO20	Puro™ Type 3 Water System - 20L/hr
	PURO50	Puro™ Type 3 Water System - 50L/hr
	PURO80	Puro™ Type 3 Water System - 80L/hr
	TC016	Puro™ Annual Consumable Pack
<b>Geno™</b>	GENO10	Geno™ Type 2 Water System - 10L/hr
	GENO20	Geno™ Type 2 Water System - 20L/hr
	GENO50	Geno™ Type 2 Water System - 50L/hr
	TC017	Geno™ Annual Consumable Pack
	<b>Alto™</b>	ALTO
ALTO-R		Alto™ Type 1 Water System - Remote Dispenser
ALTO-T		Alto™ Type 1 Water System - Tank Fed
ALTO-T-R		Alto™ Type 1 Water System - Tank Fed - Remote Dispenser
ALTO-UF		Alto™ Type 1 Water System - UF
ALTO-UF-T		Alto™ Type 1 Water System - UF - Tank Fed
ALTO-UF-R		Alto™ Type 1 Water System - UF - Remote Dispenser
ALTO-UF-T-R		Alto™ Type 1 Water System - UF - Tank Fed - Remote Dispenser
TC015		Alto™ Annual Consumable Pack (Non-UF Models)
TC020		Alto™ Annual Consumable Pack (UF Models)
<b>Duo™</b>	DUO10	Duo™ Type 2 & Type 1 Water System - 10L/hr - Integral Dispenser
	DUO10-R	Duo™ Type 2 & Type 1 Water System - 10L/hr - Remote Dispenser
	DUO10-UF	Duo™ Type 2 & Type 1 Water System - 10L/hr - UF
	DUO10-UF-R	Duo™ Type 2 & Type 1 Water System - 10L/hr - UF - Remote Dispenser
	DUO20	Duo™ Type 2 & Type 1 Water System - 20L/hr - Integral Dispenser
	DUO20-R	Duo™ Type 2 & Type 1 Water System - 20L/hr - Remote Dispenser
	DUO20-UF	Duo™ Type 2 & Type 1 Water System - 20L/hr - UF
	DUO20-UF-R	Duo™ Type 2 & Type 1 Water System - 20L/hr - UF - Remote Dispenser
	TC018	Duo™ Annual Consumable Pack (Non-UF Models)
	TC019	Duo™ Annual Consumable Pack (UF Models)
	<b>Reservoirs</b>	TANK30
TANK60		Tank Storage 60L Volume
TANK100		Tank Storage 100L Volume
TANK100P-1		Tank Storage 100L Volume - Integral Pump - 230V
<b>Accessories</b>		AV001
	AV002	UV Upgrade Kit - Tank Mounted (Pico™)
	AV003	Distribution Pump Kit (Pico™)
	AV004	Valve Kit for Washing Machine Feed (Single POU)
	AV006	Wall Mounting Kit (Alto™/Duo™/Geno™/Puro™)
	AV007	External Pre-filter Housing Kit (Excludes Filter)
	AV008	Wall Mounting Kit (TANK30)
	AV009	Wall Mounting Kit (TANK60)
	AV010	Remote Dispenser Assembly (Alto™/Duo™)
	AV012	UV Upgrade Kit (TANK30/TANK60)
	AV013	UV Upgrade Kit (TANK100)
	AV014	Level Sensor Kit (Custom Tank)
	AV016	Valve Kit for Washing Machine Feed (Double POU)
	TC038	Filter 10" Spun Element (For AV007)
	TC039	Filter 10" Pleated Element (For AV007)
	TC040	Filter 10" Carbon Element (For AV007)
	TC012	Filter Air Vent with CO <sub>2</sub> Trap (For any TANK or Pico™)

# **AVIDITY**

**SCIENCE**

## **LABORATORY WATER SYSTEMS**

### **Avidity Science Ltd**

Unit D4 Drakes Park, Long Crendon Ind Est  
Buckinghamshire, HP18 9BA, UK

+44 (0)1844 201142

[UK.Info@AvidityScience.com](mailto:UK.Info@AvidityScience.com)  
[www.AvidityScience.com](http://www.AvidityScience.com)



Certificate No: FS 558309